

# HEAT RECOVERY VENTILATOR

## Model HRV 6 LC

560 to 690 cfm (0.4 in. w.g.)



VB0062

### FOR LIGHT COMMERCIAL APPLICATIONS OR VERY LARGE HOUSES

High CFM ventilation for small business owners concerned about indoor air quality (excess moisture, smoke, odors and cleanliness). Suitable for installation above a suspended ceiling, mechanical room or suspended from a ceiling, this model delivers year-round comfort and sensible heat recovery with virtually no cross leakage. On this unit, the heat exchange efficiency can reach up to 66%.

- Best efficiency in its category
- The most compact unit on the market
- Only 24.5" (62,2 cm) high for false ceiling installation
- Defrost system
- Two-speed control
- Low voltage remote switch


### REPAIRS AND MAINTENANCE

All parts of the 6 LC such as the large access door and the entire motor sub-assembly can be removed for ease of maintenance. Furthermore, the electronic circuit board reduces electro-mechanical parts, minimizing repair time.

### WARRANTY

The 6 LC unit is fully protected by a 2-year warranty on parts, the best in the industry, and the heat recovery cores are covered by a 15-year warranty.

### ORDERING EXAMPLE

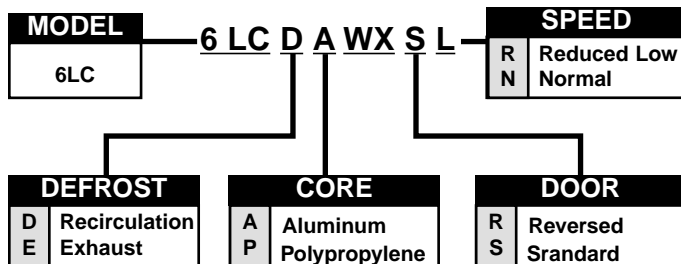

Available at:

### Controls

- Built-in electronic circuit board ready to receive one of the following main controls:
 

<b>vänEE</b>		<b>Venmar</b>	
-Basic	#40210	-VENTA	#40310
-Electro	#40220	-SUPRA	#40320
- One or more of the following optional controls can be added:
 

- Humidity Control	#200694 (vänEE)	#11297 (Venmar)
- 20-min. lighted push button	#1806110 (vänEE)	#12030 (Venmar)
- 60-min. mechanical timer	#00910 (vänEE and Venmar)	
- Wireless 20-min. push button	#03366 (Venmar)	


### Options

- Aluminum heat recovery core
- Reversed access door
- Medium efficiency air supply filters
- Recirculation defrost module
- Reduced low speed
- Flow measuring stations

### Heat Recovery Cores

Dimensions: 12" x 12" x 13.125" (30.5 cm x 30.5 cm x 33.33 cm)  
 Exchange surface: 200 ft<sup>2</sup> (18.6 m<sup>2</sup>)  
 Weight: 9.5 lbs (4.3 kg)  
 Type: Plate to plate core  
 Material: Polypropylene (2) or Aluminum (2)  
 Warranty: 15 years





A MINIMUM OF 15.000" [381] CLEARANCE FROM ANY OBSTRUCTION IS REQUIRED FOR REMOVAL OF HEAT RECOVERY CORES, FANS, ETC. ACCESS DOOR CAN BE REMOVED FROM CABINET WITH ONLY 2.000" [51mm] OF CLEARANCE.

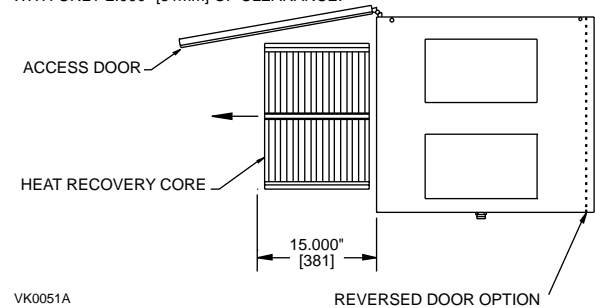

### Requirements and Standards

- Complies with the CSA C22.2 # 113 Standard applicable to ventilators.
- Complies with the CSA F444 requirements regulating the installation of Heat Recovery Ventilators.
- Complies with UL Standard 1812 - ducted Heat Recovery Ventilators.


# Dimensions and Service Clearances: HRV 6 LC

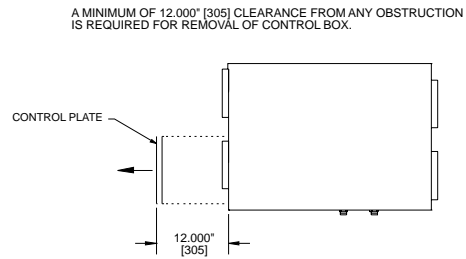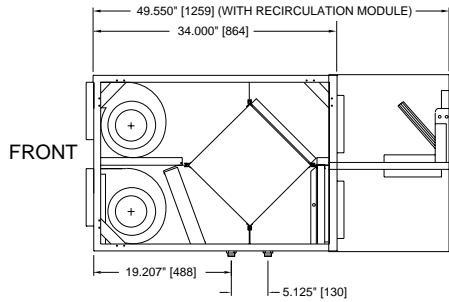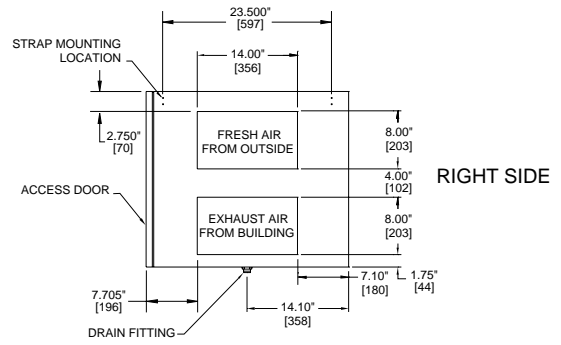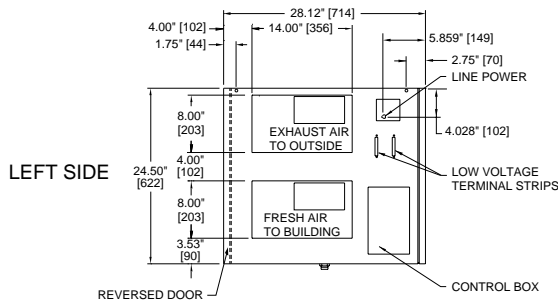

NOTE: FOR UNITS WITH THE REVERSED DOOR OPTION, INTERIOR COMPONENTS WILL APPEAR AS A MIRROR IMAGE OF THE ABOVE DIAGRAM.

VK0050A


## Performances

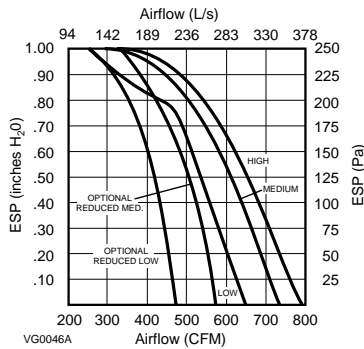

**NOTE:**  
Units are factory set on low speed as minimum setting. Must be at least 0.20 in. wg. ESP when applying the optional reduced low speed to maintain fan stability.  
Use of MEF filters will add an additional system pressure of: 0.14 in. wg @ 600 cfm with clean filters.

VG0046A

## Effectiveness

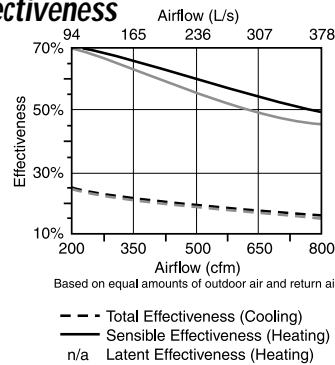

Ratings outside the scope of the ARI Energy Recovery Ventilation Certification Program.

VG0047A

**Model Number: PHE500-13.1H-12S-0.11**  
**Model Number: AHE500-13.1H-12S-0.14T**  
Type: Plate (Plate) Nominal Airflow: 300 (300) scfm  
Pressure Drop: 0.51 (0.21) inches

### Leakage Ratings

	Pressure Differential	EATR	OACF	Purge Angle or Setting
Test 1:	-5.00 (-3.00) inches	0% (0%)	1.00 (1.00)	N/A (N/A)
Test 2:	0.00 (0.00) inches	0% (0%)	1.00 (1.00)	N/A (N/A)
Test 3:	5.00 (3.00) inches	0% (0%)	1.00 (1.00)	N/A (N/A)

### Thermal Effectiveness Ratings at 0" Pressure Differential

	Sensible	Latent	Total
100% Airflow Heating Condition:	55% (52%)	0% (0%)	36% (34%)
75% Airflow Heating Condition:	61% (58%)	0% (0%)	40% (38%)
100% Airflow Cooling Condition:	47% (46%)	0% (0%)	18% (18%)
75% Airflow Cooling Condition:	53% (51%)	0% (0%)	20% (20%)
	Net Sensible	Net Latent	Net Total
100% Airflow Heating Condition:	55% (52%)	0% (0%)	36% (34%)
75% Airflow Heating Condition:	61% (58%)	0% (0%)	40% (38%)
100% Airflow Cooling Condition:	47% (46%)	0% (0%)	18% (18%)
75% Airflow Cooling Condition:	53% (51%)	0% (0%)	20% (20%)



Energy recovery component certified in accordance with ARI Standard 1060-2000. Actual performance in packaged equipment may vary.

## Specifications and Ratings

- Model: HRV 6 LC
- Total Assembled Weight:
  - With polypropylene cores: 148 lbs (67.13 kg)
  - With aluminum cores: 170 lbs (77.11 kg)
- All Duct Connections: 8" x 14" (20.32 x 35.56 cm)
- Drains: 3/4" fittings (1.9 cm)
- Filters: 4 reticulated washable foam filters (20 ppi) and 2 optional disposable 30% medium efficiency filters
- Cabinet: 20 ga. pre-painted steel
- Mounting: Reinforced rubber straps

NOTE: All specifications are subjected to change without notice.

- Insulation: 3/4" (1.9 cm) foil faced and 1" (2.54 cm) acoustic fiberglass wool
- Supply & Exhaust Blower Motors:
  - motor type: PSC motors with sealed sleeved bearings, 3 speeds (2 available to customer)
  - R.P.M.: 1625
  - H.P.: 1/4
  - fan type: direct drive centrifugal blower 7 1/8" x 6" (18.1 x 15.25 cm)
  - housing: galvanized steel

- Fan Speed Control: -Low, medium & high speed
  - Two speeds available to user
  - Low (or optional reduced low) or medium (or optional reduced medium) speed is selected at the time of installation
- Unit Electrical Characteristics:
  - Voltage: 115 volts
  - Power: 640 watts
  - Current: 5.7 amperes

Submitted by:		Date:	Project:
Qty:	Model #:	Remarks:	Location:
			Architect:
			Engineer:
			Contractor:

